


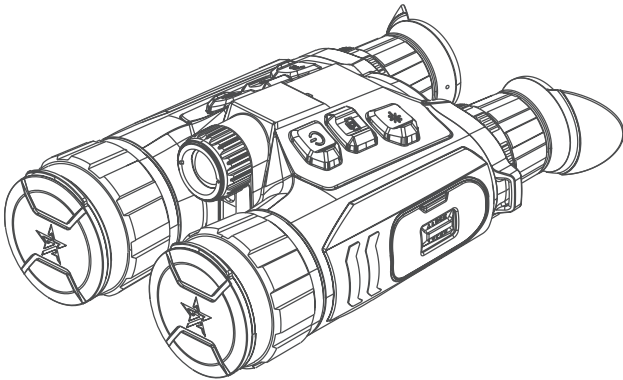

ObservIR

LRF 50-640

LRF 60-1280

MULTIFUNCTIONAL DAY/NIGHT
4K DIGITAL AND THERMAL BINOCULARS
WITH BUILT-IN LASER RANGEFINDER

USER MANUAL

© 2025 AGM Global Vision, LLC. All rights reserved.

This documentation is subject to change without notice.

No parts of this manual, in whole or in part, may be copied, photocopied, translated, or transmitted by any electronic medium or in machine-readable form without the prior written permission of AGM Global Vision, LLC.

If you have questions that are not covered in this manual, or need service, contact AGM Global Vision customer support for additional information prior to returning a product.

AGM Global Vision, LLC

2407 E Interstate 30, Suite 100

Grand Prairie, TX 75050

Tel. 928.333.4300

support@agmglobalvision.com

www.agmglobalvision.com

EXPORT INFORMATION

Buyer acknowledges that all products supplied by AGM Global Vision, LLC are subject to U.S. export control laws, including, but not limited to, the Export Administration Regulations, the International Traffic in Arms Regulations, the International Economic Emergency Powers Act, and various U.S. embargoes and sanctions. AGM Global Vision products may not be exported, re-exported, or transferred contrary to U.S. export control laws. In particular, AGM Global Vision products may not be exported, re-exported, or transferred to prohibited countries, individuals, organizations, or entities, including but not limited to those individuals and entities listed on the List of Specially Designated Nationals and Blocked Persons administered or maintained by the U.S. Office of Foreign Assets Control ("OFAC"), the various lists maintained by the Bureau of Industry and Security of the Department of Commerce, and the U.S. State Department and Buyer represents and warrants that neither Buyer nor any of its officers, directors, or employees are on such lists. Distribution or resale by Buyer to such countries, individuals, organizations, or entities is expressly prohibited. Buyer has and will maintain a positive process to ensure compliance with this Section.

FCC INFORMATION

Please note that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC/IC RSS-102 radiation exposure limits set forth for an uncontrolled environment.



FCC compliance: This product has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This product generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this product does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

EU CONFORMITY STATEMENT



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the EMC Directive 2014/30/EU, the RoHS Directive 2011/65/EU



2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info



Regulation (EU) 2023/1542 (Battery Regulation): This product contains a battery and it is in conformity with the Regulation (EU) 2023/1542. The battery cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), or lead (Pb). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info

LIST OF CONTENTS

TITLE	PAGE
Safety Summary	5
1. GENERAL INFORMATION	7
1.1 System Description	7
1.2 Standard Components	8
1.3 Key Features	9
2. OPERATING INSTRUCTIONS	10
2.1. Basic Operations	10
2.2 Main Function	19
2.3 Client Software Introduction	33
3. MAINTENANCE	34
3.1 Maintenance	34
3.2 Troubleshooting	35
4. WARRANTY INFORMATION	36
4.1 Warranty Information and Registration	36
5. SPECIFICATIONS	38
5.1 Specifications	38

SAFETY SUMMARY

- Read and follow all instructions
- Read all warnings
- Only use the attachments/accessories specified by the manufacturer
- All service must be provided by the manufacturer

WARNING:

This product contains natural rubber latex, which may cause potentially fatal allergic reactions! If you are allergic to latex, it is important that you strictly avoid exposure to products that contain it.

WARNING AND CAUTIONS:

Transportation

- Keep the device in original or similar packaging while transporting it.
- Keep all wrappers after unpacking them for future use. In case of any failure occurred, you need to return the device to the factory with the original wrapper. Transportation without the original wrapper may result in damage on the device and the company shall not take any responsibilities.
- DO NOT drop the product or subject it to physical shock. Keep the device away from magnetic interference.

Power Supply

- If a power adapter is provided in the device package, use the provided adapter only. If no power adapter is provided, ensure the power adapter or other power supply complies with Limited Power Source (5 VDC/9 VDC, 3 A). Refer to the product label for the power supply output parameters.
- Make sure the plug is properly connected to the power socket.
- DO NOT connect multiple devices to one power adapter, to avoid overheating or fire hazards caused by overload.

Battery

- Improper use or replacement of the battery may result in explosion hazard. Replace with the same or equivalent type only.
- The device supports removable rechargeable li-ion battery. The battery size should be 86×48 mm. The battery rated voltage and capacity is 7.18 V/ 5400 mAh.
- Batteries of improper size cannot be installed, and may cause abnormal shutdown.
- Make sure the battery temperature is between 0 °C to 50 °C (32 °F to 122 °F) when charging.
- For long-term storage of the battery, make sure it is fully charged every half year to ensure the battery quality. Otherwise, damage may occur.
- Do not charge other battery types with the supplied charger. Confirm there is no flammable material within 2 m of the charger during charging.
- DO NOT place the battery near heating or fire source. Avoid direct sunlight.
- DO NOT subject the battery to extremely low air pressure, which may result in an explosion or the leakage of flammable liquid or gas.
- DO NOT swallow the battery to avoid chemical burns.
- DO NOT leave the battery in places accessible for children.
- The battery cannot be charged with external power source directly.

Maintenance

- If the product does not work properly, please contact your dealer or the nearest service center. We shall not assume any responsibility for problems caused by unauthorized repair or maintenance.
- Wipe the device gently with a clean cloth and a small quantity of ethanol, if necessary.
- If the equipment is used in a manner not specified by the manufacturer, the protection provided by the device may be impaired.
- Clean the lens with soft and dry cloth or wiping paper to avoid scratching it.

Using Environment

- Make sure the running environment meets the requirement of the device. The operating temperature shall be -30°C to 55°C (-22°F to 131°F), and the operating humidity shall be 95% or less.
- DO NOT expose the device to extremely hot, cold, dusty, corrosive, saline-alkali, or damp environments.
- Avoid equipment installation on vibratory surface or places subject to shock (neglect may cause equipment damage).
- DO NOT aim the lens at the sun or any other bright light.

EMERGENCY:

If smoke, odor, or noise arises from the device, immediately turn off the power, unplug the cable, and contact the service center.

LASER CAUTION:

When any laser equipment is in use, make sure that the device lens is not exposed to the laser beam, or it may burn out. The laser radiation emitted from the device can cause eye injuries, burning of skin or inflammable substances. Before enabling the light supplement function, make sure no human or inflammable substances are in front of the laser lens. Do not place the device where minors can fetch it. According to IEC 60825 1:2014, EN 60825 1:2014+A11:2021, and EN 50689:2021, this laser product is classified as Class 1 laser product and consumer laser product.

Complies with FDA performance standards for laser products except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No.56, dated May 8, 2019.



1 GENERAL INFORMATION

1.1 SYSTEM DESCRIPTION

The AGM ObservIR LRF Thermal & Digital Day/Night Vision binoculars are some of the most technologically advanced and feature-packed optics in the world. The primary engine behind these binoculars lies within the main thermal viewing channel, with its high-sensitivity 12 micron detector. The ObservIR line offers a wide range of lenses and thermal sensors. Unlike other thermal binoculars on the market, the ObservIR LRF also comes outfitted with a digital day/night channel. The built-in 1,000m laser rangefinder simply takes the ObservIR LRF to another level, and this is without even mentioning its 64GB of internal memory and WiFi compatibility.

The ObservIR LRF binoculars also come packed with numerous software improvements, and many features that have become commonplace within the AGM thermal product assortment: high-sensitivity thermal detector, Thermal channel objective lens with a 1.0 aperture, 3840x2160 ultra-low light CMOS sensor, various viewing modes, multiple color palettes, digital zoom, picture-in-picture mode, built-in laser rangefinder, GPS module, long-range IR illuminator, up to 8.5 hours of battery life on removable, rechargeable battery, USB Type-C port for external power capabilities, IP67 waterproof rating.

ObservIR LRF 50-640

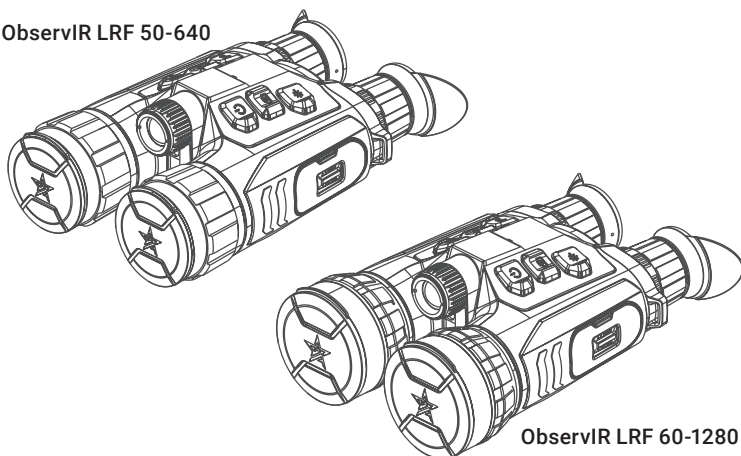


FIGURE 1-1. OBSERVIR LRF MODELS

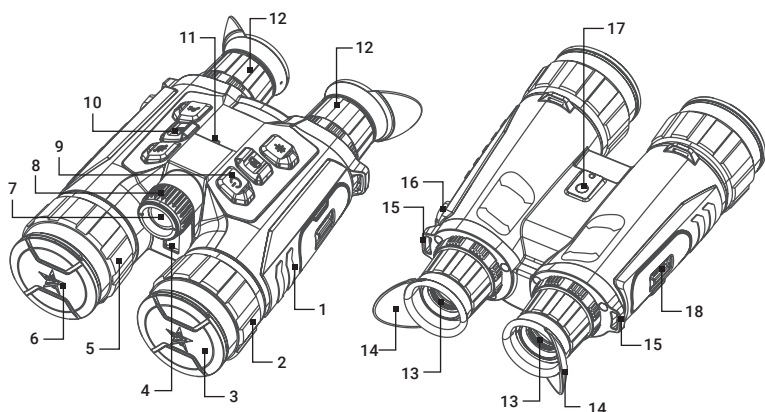


FIGURE 1-2. MAIN PARTS

TABLE 1-1. MAIN PARTS

ITEM	DESCRIPTION
1	Body
2	Digital Channel Focus Ring
3	Digital Channel Lens
4	Laser Rangefinder (LRF)
5	Thermal Channel Focus Ring
6	Thermal Channel Lens
7	Infrared (IR) Illuminator
8	IR Focus Adjustment
9	Power Button

ITEM	DESCRIPTION
10	Control Buttons
11	Power LED Indicator
12	Diopter Adjustment Ring
13	Eyepiece
14	Foldable Eyecup
15	Neck Strap Attachment
16	USB Type-C Interface
17	Tripod Adapter Socket
18	Battery Compartment

1.2 STANDARD COMPONENTS

The standard components are shown in Figure 1-2 and listed in Table 1-2. The ITEM column indicates the number used to identify items in Figure 1-2.

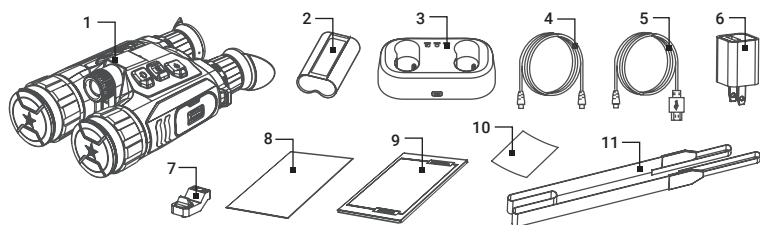


FIGURE 1-2. STANDARD COMPONENTS

TABLE 1-2. STANDARD COMPONENTS

ITEM	DESCRIPTION	QUANTITY
1	Binoculars	1
2	NE-7255 Battery	2
3	NE-7255 Charger	1
4	USB-C to UCB-C Cable (fast charging)	1
5	USB-A to USB -C Cable	1
6	Power Adapter	1
7	Tripod Adapter	1
8	Quick Start Guide	1
9	User Manual	1
10	Lens Cloth	1
11	Neck Strap	1

1.3 KEY FEATURES

- Dual-spectrum thermal and digital day/night system
- 12 micron high-sensitivity thermal detector
- New Image Boost 3.0 algorithm
- Ultra-low illumination digital channel
- 3840×2160 digital channel resolution
- Eye-safe 1,000 m laser rangefinder
- Built-in IR illuminator
- 1920×1080 resolution, 0.49-inch OLED display
- Digital magnetic compass
- Built-in GPS module
- Video/audio recording and snapshot capture
- Built-in 64 GB EMMC storage
- WiFi hotspot
- Standby mode
- Up to 8.5 hours continuous operation on a single charge (depends on the model)
- Auto screen-off function to saving energy
- External power supply capability
- Tripod mount adapter
- Waterproof and dustproof

2 OPERATING INSTRUCTIONS

2.1. BASIC OPERATIONS

2.1.1 UNPACKING

The following steps must be completed prior to each mission.

1. Open the carrying case, remove the device, and verify that all components are included.
2. Inspect the device for any obvious evidence of damage to the optical surfaces, body, eyecups, operation buttons, etc. Ensure that all optical surfaces are clean and ready for use. Clean all optical surfaces with a lens tissue.

2.1.2 BATTERY INSTALLATION

NOTE:

- The device supports a removable NE-7255 rechargeable Li-ion battery. The battery size should be 86×48mm. The battery rated voltage and capacity is 7.18 V/5400 mAh.
 - Charge the battery with the supplied NE-7255 Charger for more than 4 hours before first use. You can also charge the battery installed in the device using an external 5V/9V, 3A power adapter via the binocular's Type-C port.
 - Remove the battery from the device if it will not be used for an extended period.
1. Unlock by the latch (Fig.2-1, 1) of the battery compartment cover.

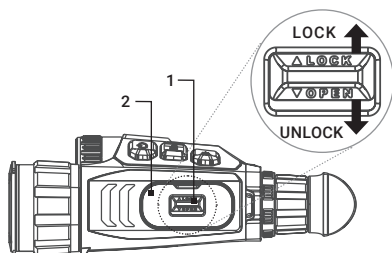


FIGURE 2-1. BATTERY COMPARTMENT

2. Open the battery compartment cover (2).
3. Insert the battery into the battery compartment (Fig. 2-2). The latch locks the battery in place when the battery is fully inserted.
4. Close the battery compartment cover and lock it.

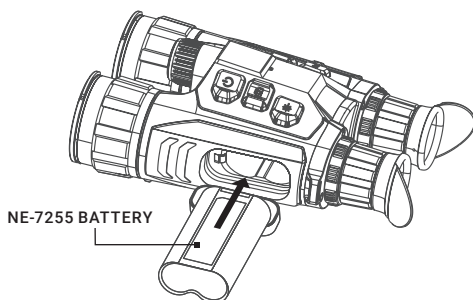


FIGURE 2-2. BATTERY INSTALLATION

2.1.3 BATTERY REMOVING

1. Turn off the device and open the battery compartment cover.
2. Push the battery latch in the direction shown in Figure 2-3 to release the battery, and then remove the battery.

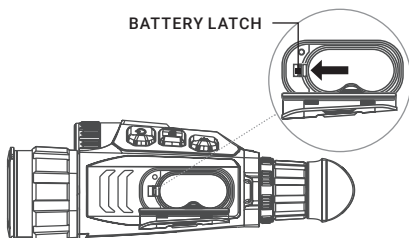


FIGURE 2-3. BATTERY REMOVING

2.1.4 CONTROL BUTTONS

The ObservIR LRF controls are shown in Figure 2-4 and are defined in Table 2-1. Each button is responsible for some functions selected by short press or long press the button. Pushing a button for 2+ second is considered "long press" (hold the button).

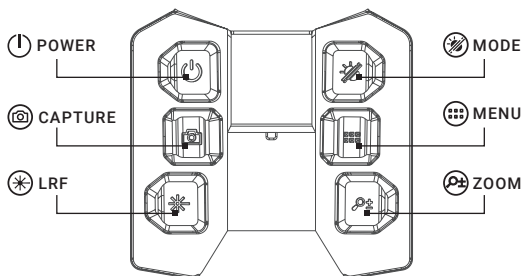


FIGURE 2-4. CONTROL BUTTONS

TABLE 2-1. FUNCTIONS OF CONTROL BUTTONS

CONTROLS	FUNCTIONS
 POWER	Press: Standby Mode / Wake Up Device Hold: Power ON/OFF
 CAPTURE	Press: Image Capture Hold: Start/Stop Video Recording
 LRF	Press: Turning On the Laser / Distance Measurement Double Press: Turning Off the Laser Hold: Image Calibration (FFC)
 MODE	Press: Switch Palettes Hold: Switch DAY/NIGHT/GREEN/YELLOW/AUTO Mode <u>MENU MODE</u> Press: Up/Change Parameters
 MENU	Press: Enter the Menu <u>MENU MODE</u> Press: Confirm / Set Parameters Hold: Save and Exit the Menu
 ZOOM	Press: Switch Magnification Hold: Enable/Disable PIP Mode <u>MENU MODE</u> Press: Down/Change Parameters

2.1.5 POWER ON AND OFF

Power On

When the charged batteries are installed, hold the POWER button  to power on the device.

NOTE

See the battery icon on the device display to check the battery charge. Icon  means the battery is fully charged, and icon  means that the battery is low. When the low power note shows, replace the batteries.

Power Off

Hold the POWER button  to power off the device.

Auto Power Off

In the "Auto Power Off" menu (see 2.2.32) you can set the time for the automatic shutdown of the device as required (OFF / 15 min / 30 min / 45 min). The Auto Power Off countdown will start again when the device exits standby mode, or the device is restarted.

2.1.6 STANDBY MODE

Standby mode is used to save battery power. In this mode, some power-consuming features such as the display, network hardware, or internal storage will be temporarily disabled.

In the view mode, press the POWER button . After a few seconds, the display will turn off. Press the POWER button  again to exit the Standby mode. When the Auto Screen Off function is enabled, you can also tilt or rotate the device to wake it from standby mode.

2.1.7 AUTO SCREEN OFF

Auto screen off function darkens the screen to save energy and increase battery time. However, the device stays on and you can view the live view on AGM Connect app when connecting the device to the app. The integrated algorithm automatically detects binocular's exact position and activates the auto screen-off function. The device will stand by automatically at a certain tilt angle or when it is stationary for more than 5 minutes (see paragraph 2.2.14 for details).

2.1.8 OBSERVATION

1. Open the objective lens caps.
2. Long press the POWER button  to turn on the binoculars.
3. Hold the binoculars and make sure the eyecups covers your eyes.
4. Press MODE button  and set the palette to display the scene with different effects in thermal or digital mode. When **DIGITAL** mode is selected you can adjust the **Display Mode**. Hold MODE button to select the display mode: **DAY**, **NIGHT**, **GREEN**, **YELLOW** or **AUTO**.
5. Adjust the interpupillary distance by moving the eyepieces (Fig.2-5, A) farther or closer to each other.
6. Rotate the diopter adjustment rings (Fig.2-5, B) until the on-screen display (OSD) text or image is clear. Once completed, diopter adjustment will no longer be needed again until the device is used by a new user.
7. Point the device towards the target of the view. Bring the object into focus by rotate the objective focus rings (Fig.2-5, C).
8. In the **NIGHT**, **GREEN**, **YELLOW** or **AUTO** mode of the digital channel slightly rotate the IR focus (Fig.2-5, D) to adjust the beam angle of the infrared light. The broader the beam angle is, the more spread-out but less intense the light will be.




FIGURE 2-5. FOCUS ADJUSTMENT

NOTE:

You must perform the focus adjustment before any further use of the binoculars.

8. For best observation effectiveness, set brightness, contrast, tone and scene mode using the device menu (for more information on these and other settings, see section 2.2).

2.1.9 ON-SCREEN DISPLAY

On-screen interface displays the main setup menu items and device status indicators. Adjust the On-Screen Display (OSD) in **Function Settings** menu (see 2.2.23). When OSD is on, the information of display mode, WiFi hotspot activation, magnification, connection status, battery status, time and date displays on the screen.

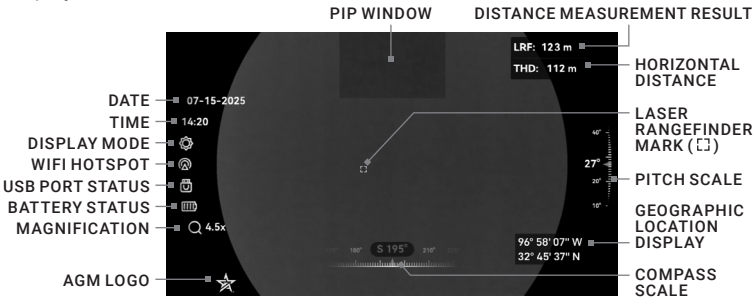


FIGURE 2-6. ON-SCREEN DISPLAY

2.1.10 PALETTE SETTINGS

You can select different palettes to display the same scene in different effects. Press the **MODE** button  in live view interface to switch palettes. When the **WHITE HOT**, **BLACK HOT**, **FUSION**, or **RED HOT** mode is selected, the thermal channel image is displayed on the screen. When the **DIGITAL** mode is selected, the device switches to the digital channel.

TABLE 2-2. PALETTE SETTINGS

PALETTE	DESCRIPTION
WHITE HOT	The hot part is white-colored in view. The higher the temperature is, the lighter the color is.
BLACK HOT	The hot part is black-colored in view. The higher the temperature is, the more black the color is.
RED HOT	The hot part is red-colored in view. The higher the temperature is, the redder the color is.
FUSION	From high temperature to low temperature, the image is colored in from white, yellow, red, pink to purple.
RED MONOCHROME	The image is colored in shades of red. The higher the temperature, the lighter the color.
GREEN MONOCHROME	The image is colored in shades of green. The higher the temperature, the lighter the color.
DIGITAL	The image of digital channel is displayed in this mode.

2.1.11 SET DISPLAY MODE

You can select different display modes for digital channel.

When the DIGITAL palette is selected, hold down the MODE button  to switch the display modes between DAY, NIGHT, GREEN, YELLOW or AUTO. The current mode is displayed on the left side of the display interface.

TABLE 2-3. DISPLAY MODE

SYMBOL	MODE	DESCRIPTION
	DAY	This full-color mode can be used at daytime and in bright light. The IR light is off automatically.
	NIGHT	This black & white viewing mode can be used at dusk and at night. In NIGHT mode, the IR light is on automatically.
	GREEN	It's a night vision mode. You can use this mode according to your personal preference.
	YELLOW	It's a night vision mode. You can use this mode according to your personal preference.
	AUTO	The DAY mode and NIGHT mode switch automatically according to the ambient brightness.

In the NIGHT and AUTO modes the built-in infrared illuminator can be activated to clearly see in the total darkness. Set IR light in the main menu (according to 2.2.6) and focus the IR beam by rotating the IR focus knob.

2.1.12 DIGITAL ZOOM

You can zoom the image by using this function.

Press the ZOOM button  in the in viewing mode to switch digital zoom. The binoculars have four levels of digital zoom. The current magnification value will be displayed on the screen. Thermal channel magnification depends on the model:

- ObservIR LRF 50-640: 4.5x / 9x / 13.5x / 20x
- ObservIR LRF 60-1280: 2.5x / 5x / 10x / 20x

The digital channel magnification is the same for both models: 5.5x / 11x / 16.5x / 22x.

Use the **Zoom Pro** feature in the main menu to enhance the details of the magnified image.

2.1.13 PICTURE IN PICTURE MODE

The Picture-in-Picture (PIP) mode allows you to see simultaneously both a magnified image of the central part in a PIP window and the main image. The PIP window is displayed at the up-center of the live view. In the live view you can enable or disable the PIP function by holding ZOOM button .

NOTES

If the PIP function is enabled, only the PIP view zooms when adjusting the digital zoom ratio.

If the PIP function is enabled in thermal mode, the PIP view only switches between current palette and digital channel mode; if the PIP function is enabled in digital mode, the PIP view switches among the selected palettes and digital channel mode.

2.1.14 IMAGE CALIBRATION

Hold the LRF button (⊗) in the view mode to release the shutter once for correction of the non-uniformity of display (see 2.2.25 for more information).

2.1.15 VIDEO RECORDING AND IMAGE CAPTURE

Video Recording

In the live view interface, hold the CAPTURE button (Ⓢ) to start recording. The recording time information will be displayed on the left side of the screen. Hold the CAPTURE button (Ⓢ) again to stop recording.

Image Capture

In the live view interface press the CAPTURE button (Ⓢ) to capture the image.

NOTE:

When capturing, the image freezes for 1 second and a prompt shows on the display.

2.1.16 DISTANCE MEASUREMENT

The device can detect the distance between the target and the observation position with built-in laser rangefinder.

Make the laser rangefinder settings in the menu (see details in part 2.2.13). Press the LRF button (⊗) to activate LRF. Point the square mark of the rangefinder at the target and press the LRF button (⊗) to measure the distance to the target.

You can scan the surroundings under **Continuous** mode. Continuous distance scanning will occur for a set time of 5, 10, 15, 30, or 60 seconds after pressing the LRF button (⊗).

The distance measurement result is displayed at the upper right of the image. You can also see the horizontal distance when **Horizontal Distance** mode is enabled in the menu. **LRF** means the straight-line distance, and **THD** means the horizontal distance.

Press the LRF button twice to turning off the laser.

2.1.17 CONNECTING THE DEVICE

1. Open the USB interface cover on the side of the binoculars.
2. Connect the device and power adapter with a USB Type-C cable to charge the battery installed in the device. You can also power the device using an external power source via the USB port. Alternatively, you may also connect the device to your computer using the included USB cable to copy/delete files.

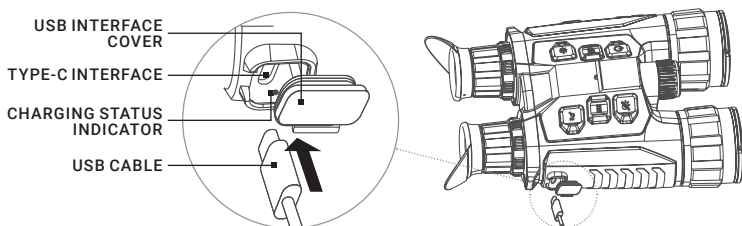


FIGURE 2-7. USB CABLE CONNECTION

The LED indicator near the Type-C port shows the charging status of the device:

- **Solid Red:** Charging.
- **Solid Green:** Fully charged.
- **Flashing Red & Green:** Error occurred.

2.1.18 CHARGE BATTERY VIA BATTERY CHARGER

1. Put one or two NE-7255 batteries in the charger.
2. Connect the charger and power adapter with a USB cable to charge the batteries. The indicator in the middle is green if the charger works properly.
3. The left and right indicators show the charging status of the batteries:
 - **Solid Red:** Charging.
 - **Solid Green:** Fully charged.

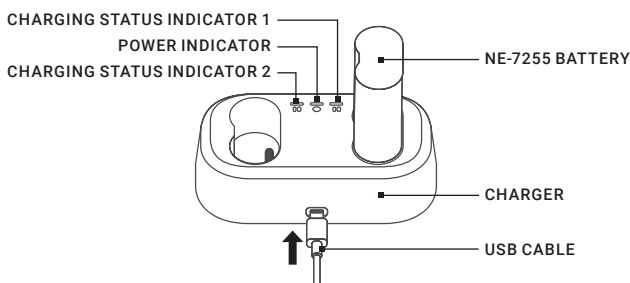


FIGURE 2-8. BATTERY CHARGER

NOTE:

- Make sure the battery temperature is between 0°C to 50°C (32°F to 122°F) when charging.
- The operating temperature of NE-7255 Charger shall be 0°C to 40°C (32°F to 104°F).
- The battery charger also supports fast charging. You need to purchase a PD USB-C power adapter and a USB type-C to type-C cable for fast charging.

2.1.19 EXPORT FILES

Before connecting the thermal binoculars to a computer, make sure the WiFi hotspot on the binoculars is disabled.

1. Hold the MENU button (Ⓜ) to show the menu.
2. Go to **Advanced Settings**, and press (⏮) or (⏭) button to select **Function Settings** menu and press the MENU button (Ⓜ) to confirm.
3. Press (⏮) or (⏭) button to select **USB Connection** submenu and press the MENU button (Ⓜ) to enter the configuration interface.
4. Press (⏮) or (⏭) button to select **USB Flash Drive**.
5. Hold the MENU button (Ⓜ) to exit a menu.
6. Connect the thermal binoculars to your PC with USB cable and open the detected disk.

NOTE:

Make sure the device is turned on when connecting the cable

7. Go to the **AGM Content** folder and find the folder named with the shooting date. For example, if you capture a picture or record a video on June 2025, go to **AGM Content -> 202506**.

- Select and copy the videos to PC and play the file with the player.
- Select and copy the snapshots to PC and view the files.

8. Disconnect the device from your PC.

NOTE:

- The device displays images when you connect it to PC. But functions such as recording, capturing and hot spot are disabled.
- When you connect the device to PC for the first time, it installs the driver automatically.

2.1.20 EXPORT FILES VIA AGM CONNECT APP

You can access device albums and export files to your phone via **AGM Connect** App (see Section 2.3).

1. Open AGM Connect app and connect your device to the app.
2. Tap **Media** to access device albums.
3. Tap to select a file, and tap **Download** to export the file to your local phone albums.

2.1.21 TRIPOD ADAPTER

Use a tripod for long-time observation or at high magnification for effective image stabilization.

1. Align the tripod adapter screw (1) and guide (2) with the socket (3).
2. Rotate the tripod adapter knob (4) clockwise to fix the tripod adapter.

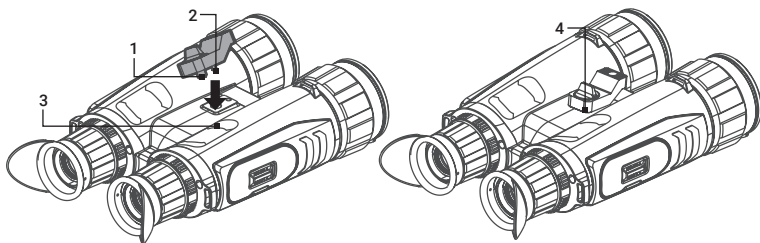


FIGURE 2-9. TRIPOD ADAPTER

2.2 MAIN FUNCTIONS

2.2.1 MAIN MENU

In the live view mode, press the MENU button  to display the **Main Menu**. In the Main Menu, you can set parameters such as Brightness, Contrast, Sharpness, Zoom Pro, LED Light and also select the **Advanced Settings** menu for additional settings.

Press  or  buttons to move between menu items. The active element is highlighted. Press the MENU button  to select menu item or change an option. Hold the MENU button  to exit the menu.



FIGURE 2-10. MAIN MENU

TABLE 2-4. MAIN MENU FUNCTIONS

MENU ITEM	SYMBOL	OPTION	FUNCTION
BRIGHTNESS		10 Levels of Brightness	Adjusts the image brightness.
CONTRAST		10 Levels of Contrast	Adjusts the image contrast.
SHARPNESS		5 Levels of Sharpness	Adjusts the thermal image sharpness.
ZOOM PRO		OFF / ON	Enables or disables the Zoom Pro function (ObservIR LRF 50-640 only).
IR LIGHT		OFF / Smart IR / High / Medium / Low	Infrared light settings.
ADVANCED SETTINGS		Advanced Settings Menu	

TABLE 2-5. ADVANCED SETTINGS MENU

MENU ITEM	SYMBOL	OPTION	FUNCTION
ALBUMS		---	View/Delete local files.
NETWORK		Close / Hotspot	Enables or disables the WiFi hotspot.

MENU ITEM	SYMBOL	OPTION	FUNCTION
HOTSPOT BAND		2.4GHz / 5GHz	Hotspot band settings.
TO NE		Cold / Warm	Switch the thermal image tone between Cold and Warm.
SCENE MODE		General / Compressed	Switch between the General and Compressed mode.
WDR		OFF / ON	Provides better image quality in various lighting conditions (DIGITAL palette only).
LASER RANGING		Laser Ranging Menu:	
Ranging Mode		Once / Continuous (5s, 10s, 15s, 30s, 60s)	LRF distance measurement settings.
Horizontal Distance		OFF / ON	Horizontal distance measurement mode.
AUTO SCREEN OFF		OFF / ON	Darkens the screen to save energy.
AUDIO		OFF / ON	Enables or disables audio recording.
CHANNEL VIEWING ACTIVATION		White Hot ON/OFF Black Hot ON/OFF Red Hot ON/OFF Fusion ON/OFF Red Monochrome ON/OFF Green Monochrome ON/OFF Digital ON/OFF	Setting up the display of different palettes for selection.
GPS		OFF / ON	Geographic Location Display.
COMPASS		OFF / ON	Enables or disables Compass. Magnetic declination correction.
HOT TRACKING		OFF / ON	Enables or disables hot spot mark (marking the spot of highest temperature).
CHANNEL VIEWING ACTIVATION		OFF / ON 7 palettes	Setting up the display of different palettes for selection.
FUNCTION SETTINGS		Function Settings Menu:	
OSD		OSD / Time / Date	Enables or disables OSD, time, date.
Brand Logo		OFF / ON	Enables or disables AGM logo on the screen.

MENU ITEM	SYMBOL	OPTION	FUNCTION
USB Connection		USB Flash Drive/ Digital	USB port mode settings.
Image Calib.		Auto / Semi-Auto / Manual	Selecting the Flat Field Correction (FFC) mode.
DPC		Axis: X/Y	Correction of dead pixel manually.
Burn Prevention		OFF / ON	Enables or disables the Burn Prevention function.
GENERAL SETTINGS		General Settings Menu:	
Language		23 Languages	Choice of interface language.
Time		12 / 24 hour	Time setting.
Date		Month/Day/Year	Date setting.
Unit		yd / m	Sets the distance unit.
Auto Power Off		OFF / 15 min / 30 min / 45 min	Setting the automatic shutdown time.
Reboot		---	Reset the basic settings: Brightness, Contrast, PIP, etc.
Restore Factory Settings		---	Restoring the default device settings and erase all internal storage content.
Version		---	Firmware version, serial number and current free space of the internal storage.

2.2.2 BRIGHTNESS ADJUSTMENT

1. Press the MENU button  to call the Main Menu.
2. Select  **Brightness** menu item and press the MENU button  to confirm.
3. Press  or  buttons to adjust the brightness. You can select one of ten levels of the brightness to adjust the image lighter or darker. Press the MENU button  to confirm.
4. Press  or  to select other item or hold the MENU button  to exit a menu.

2.2.3 CONTRAST ADJUSTMENT

1. Press the MENU button  to call the Main Menu.
2. Select  **Contrast** menu item and press the MENU button  to confirm.
3. Press  or  buttons to adjust the image contrast. You can select one of ten levels of the contrast. Press the MENU button  to confirm.
4. Press  or  to select other item or hold the MENU button  to exit a menu.

2.2.4 SHARPNESS SETTING

This function allows you to adjust the sharpness of the thermal image.

1. Press the MENU button  to call the Main Menu.
2. Select  Sharpness menu item and press the MENU button  to confirm.
3. Press  or  button to adjust the image sharpness. You can select one of five levels of the image sharpness. Press the MENU button  to confirm.
4. Press  or  to select other item or hold the MENU button  to exit a menu.

2.2.5 ZOOM PRO

When you turn on **Zoom Pro** function, the details of zoomed image will be enhanced.

1. Press the MENU button  to call the Main Menu.
2. Press  or  button to select  Zoom Pro menu item and press the button  to enable or disable Zoom Pro mode.
3. Press  or  to select other item or hold the MENU button  to exit a menu.

NOTES:

If the PIP function is enabled, zoom pro is only enabled in the PIP view.

Zoom Pro cannot be enabled when device battery is low.

2.2.6 IR LIGHT

The built-in infrared illuminator can be activated to clearly see in the total darkness. The infrared light only works in NIGHT and AUTO display modes when DIGITAL palette is activated.

1. Press the MENU button  to call the Main Menu.
2. Press  or  to select  IR LIGHT menu and press  to confirm.
3. Press  or  to select the IR light level between **Low**, **Medium** or **High** or set the **Smart IR** mode. Select **OFF** to turn off the IR light.

NOTE

The image might be overexposed when the environment is too bright. The Smart IR function adjusts the overexposed images by controlling infrared light intensity, so as to improve the image effect in night mode and dark environment.

4. Press the MENU button  to confirm and exit.

NOTE

Infrared light cannot be turned on if the battery is low.

The infrared light is off in the thermal mode or standby mode.

2.2.7 ALBUMS

Captured images and recorded videos are automatically stored in the device, and you can view the files in local albums.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings**, press  or  to Select the  **Albums** menu item and press the MENU button  to confirm.

NOTE:

The albums are automatically created and named by year + month. The local pictures and videos of a certain month are stored in the corresponding album. For example, the pictures and videos of August in 2024 are saved in the album named "202408".

3. Press  or  button to select the album, and press the MENU button  to enter the selected album.
4. Press  or  button to select a file to view.
5. Press the MENU button  to view the selected file and relevant information.

NOTE:

Files are arranged in chronological order, with the most recent at the top. If you fails to find the most recently taken snapshots or videos, please check the time and date settings of your device. When you are viewing files, you can switch to other files by pressing  or .

When you are viewing files, you can press  to turn to next page, and press  to go back to previous page.

When you are viewing videos, you can press  to play or stop the video.

For deleting an album or a file, you can hold  to call the dialogue box, and delete the album or file according to the prompt.

2.2.8 NETWORK CONFIGURATION

Connect your phone to the binoculars' WiFi hotspot, and you can customize the settings and use the device's features.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings** and press  or  button to select the  **Network** menu item. Press the MENU button  to enable or disable WiFi hotspot.
3. Open the AGM Connect App and connect your phone with the device (refer to Section 2.3). You can view the interface of binoculars on your phone.
4. Hold the MENU button  to exit.

NOTE:

When the power is less than 15%, the WiFi hotspot function will be turned off automatically.

2.2.9 HOTSPOT BAND

This features allows to select the WiFi band and helps solve smartphone connection issues and improve the connection between the thermal device and the smartphone.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings** and press  or  to select the  **Hotspot Band** menu item. Press the MENU button  to enter the setting interface.
3. Press  or  button to switch 2.4 GHz or 5 GHz hotspot bandwidth.
4. Press the MENU button  to confirm and exit.

2.2.10 IMAGE TONE SETTING

This function allows you to change the tone of thermal image to warm or cold.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings**, then press  or  button to select  **Tone** menu item and press the MENU button  to confirm.
3. Press  or  button to select **Warm** or **Cold** tone and press the MENU button  to confirm.
4. Press  or  to select other item or hold the MENU button  to exit a menu.

2.2.11 SCENE MODE

You can select proper **Scene Mode** according to environment temperature to improve the display effect.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings**, press  or  button to select  **Scene Mode** menu item and press the MENU button  to confirm.
3. Press  or  button to switch scene mode:
General mode: improves an image so that the object edge is more distinct.
Compressed mode: is more suitable for hunting environment because of the highlight function of small objects.
4. Press the MENU button  to confirm.
5. Press  or  button to select other item or hold the MENU button  to exit a menu.

2.2.12 WDR

WDR (Wide Dynamic Range) enhances the viewing experience in the Digital channel, providing better image quality in diverse lighting conditions. When this feature is enabled, it prevents excessive brightness in light areas and increases shadow detail.

1. Press the MENU button  to show the menu.
2. Go to  **Advanced Settings**, and press  or  to select  **WDR** menu.
3. Press the MENU button  to enable or disable the WDR function.
4. Hold the MENU button  to exit.

2.2.13 SET LASER RANGING

The device can detect the distance between the target and the observation position with built-in laser rangefinder.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings**, press  or  to Select the  **Laser Ranging** menu item and press the MENU button  to confirm.
3. Press  or  button to select  **Ranging Mode** and press the MENU button  to confirm.
4. Press  or  button to select the laser ranging mode between **Once** and **Continuous (5s)**, **Continuous (10s)**, **Continuous (15s)**, **Continuous (30s)**, **Continuous (60s)**. Press the MENU button  to set selected mode.

5. Press or button to select **Horizontal Distance** and press the MENU button to enable or disable the horizontal distance measurement.
4. Hold the MENU button to exit.

2.2.14 AUTO SCREEN OFF

Auto Screen Off function darkens the screen to save energy and increase battery time. However, the device stays on and you can view the live view on AGM Connect app when connecting the device to the app.

1. Press the MENU button to call the Main Menu.
2. Go to **Advanced Settings** and press or button to select **Auto Screen Off** menu item. Press the MENU button to enable or disable Auto Screen Off function.
3. Press or to select other item or hold the MENU button to exit a menu.

You can use one of the following methods to enter the standby mode when the display is turned on:

- Tilt the device downwards from 70° to 90°.
- Rotate the device horizontally from 75° to 90°.
- Keep the device still and do not move it for 5 minutes.

You can use one of the following methods to wake up the device when the display is turned off:

- Tilt the device downwards from 0° to 60° or upwards from 0° to 90°.
- Rotate the device horizontally from 0° to 70°.
- Press POWER button to wake up the device.

NOTE

After enabling the auto screen off, when you enter the menu, the auto screen off does not take effect until you exit the menu.

2.2.15 AUDIO RECORDING SETTING

The **Audio** function allows you to record sound along with video. If there is too much noise when recording, this function can be disabled.

1. Press the MENU button to call the Main Menu.
2. Go to **Advanced Settings** and press or button to select **Audio** menu item. Press the MENU button to enable or disable this function.
3. Press or button to select other item or hold the MENU button to exit a menu.

2.2.16 CHANNEL VIEWING ACTIVATION

You can select different palettes to display the same scene in different effects. In the **Channel Viewing Activation** menu you can select palettes that will be cycled through when you press the MODE button in live view interface.

1. Press the MENU button to call the Main Menu.
2. Go to **Advanced Settings** and press or to select the **Channel Viewing Activation** menu.
3. Press the MENU button to go to the palettes interface.

4. Press  or  button to select the palette required, and press the MENU button  to enable or disable it.

NOTE

At least one palette should be enabled.

5. Hold the MENU button  to exit.

2.2.17 GPS

Equipped with satellite positioning modules, the device is able to display the longitude and latitude, as well as the sea level altitude of the device on the live image, captured images, and recorded videos.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings** and press  or  to select the  **Function Settings**.
3. Press  or  button to select  **GPS** menu item, and press the MENU button  to enable or disable GPS.
4. Press  or  button to select other item or hold the MENU button  to exit a menu.

When GPS is enabled you can see the location information displayed at the lower right corner of the screen (see Figure 2-4). The message "Weak Signal" in this place, indicates the signal is weak or no signal. Please move to the open outdoor space and try again.

NOTE:

- The satellite module is not able to receive signals when the device is indoor. Place the device in an empty outdoor space to receive signals.
- In an outdoor space, wait for a moment for the device to display its location.

2.2.18 COMPASS

Equipped with a compass, the device is able to display its direction on the live image, captured images, and recorded videos.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings** and press  or  to Select the  **Function Settings**.
3. Press  or  button to select  **Compass** menu item, then press the MENU button  to enter the compass interface.
4. Press  or  button to select Compass and press the MENU button  to enable or disable the magnetic compass.
5. Follow the pop-up instructions to calibrate the compass. See **Calibrate Compass** or more information.

After successful calibration, you can see the azimuth angle displayed at the bottom of the screen and elevation angle displayed on the right side of the screen as a pitch scale. It is recommended to read the direction when you lay the device horizontally.

To increase the direction accuracy, you can set the magnetic declination correction. See part 2.2.20 Magnetic Declination Correction for instructions.

2.2.19 CALIBRATE COMPASS

Calibrating the compass is necessary to display the correct direction.

You need to calibrate the compass when you enable the function for the first time, or when the compass is magnetically interfered, and the direction information displays red.

1. Call the calibration guide by the following ways.
 - When you enable compass for the first time, the compass calibration guide pops up.
 - When the compass information displays red, select  **Compass** in menu mode and press the MENU button  to re-enable compass.




FIGURE 2-10. CALIBRATE COMPASS

2. Follow the screen instructions to move and rotate the device.

NOTE:

During calibration, keep moving and rotating the device to make sure that the device faces every possible directions.

Calibration Level indicates the validity of calibration. Higher level means more accurate compass reading. Calibration succeeds when the Calibration Level turns to 3.

3. Stop moving the device when calibration success message pops up.
The direction information is displayed on the up right of the live view image.

2.2.20 MAGNETIC DECLINATION CORRECTION

Magnetic declination is the angle variation between magnetic north and true north. Adding the magnetic declination to the compass increase the accuracy of direction reading.

1. After the compass is calibrated, go to the compass setting interface and select **Magnetic Declination**.
2. Press the MENU button  to enter the setting interface, and press  or  to select **Quick Correction** or **Manual Correction**.
 - In Quick Correction, the device displays the current declination to magnetic north. Point the binoculars to true north and press the MENU button .
 - In Manual Correction, press the MENU button  to select the operational symbol or number, and then press  or  button to add or subtract the declination of device location.
3. Hold the MENU button  to save and exit.

NOTE

It is recommended to check the local magnetic declination information on the authorized website before manually correcting the magnetic declination. The eastern magnetic declination is indicated with a positive mark (+), and the western declination is indicated with a negative mark (-).

2.2.21 HOT TRACKING

The device can detect the highest temperature spot in the scene and mark it on display.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings** and press  or  button to select  **Hot Tracking** menu item. Press the MENU button  to enable/disable hot spot mark (marking the spot of highest temperature).
3. Press  or  button to select other item or hold the MENU button  to exit a menu.

When the hot spot mark is enabled, the green cross mark  displays in the spot of the highest temperature. When the scene changes, the green mark moves.

2.2.22 ON-SCREEN DISPLAY (OSD)

You can choose which OSD information to display in the live view user interface. Options include, WiFi hotspot activation, current magnification, battery indicator status, connection status, time and date. These will appear at the top of the display interface when activated.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings** and press  or  button to select  **Function Settings** menu. Press the MENU button  to confirm.
3. Press  or  button to select  **OSD** submenu and press the MENU button  to enter.
4. Press  or  button to select the **OSD, Time or Date**. Press the MENU button  to display or hide the necessary information.
5. Hold the MENU button  to exit OSD menu.

2.2.23 BRAND LOGO

You can display the AGM logo in the lower left corner of the screen.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings** and press  or  button to select  **Brand Logo** menu item. Press the MENU button  to enable/disable logo.
3. Press  or  to select other item or hold the MENU button  to exit a menu.

2.2.24 USB CONNECTION

The USB port can be used to transfer data to a PC, charge the installed batteries, or casting screen to PC by UVC protocol-based client software or player. You can view the device screen image on the monitor to get a better and clearer image, more convenient to checking the details.

1. Press the MENU button  to call the Main Menu.

2. Go to **Advanced Settings**, and press or to select **Function Settings** menu and press the MENU button to confirm.
3. Press or to select **USB Connection** submenu and press the MENU button to enter the configuration interface.
4. Press or to select **USB Flash Drive** for transfer data or charge the battery, or **Digital** to casting screen to PC.
5. Hold the MENU button to exit a menu.

2.2.25 IMAGE CALIBRATION

The image calibration function performs what is known as the Flat Field Correction or FFC. This is required of all thermal devices. This can correct for non-uniformity of the display. During correction an internal shutter will be lowered in front of the thermal detector. A “click” sound will often be heard, and the image is momentarily interrupted for a split second. After this quick process the detector will be re-calibrated, and the image becomes more accurate. AGM recommends automatic when scanning for game or targets. However, we recommend going into the menu and changing to Manual correction mode when getting close making your shot. This will prevent any unwanted auto-correction occurring when tracking live game. This will help shooters in making ethical shot placements at all times.

1. Press the MENU button to call the Main Menu.
2. Go to **Advanced Settings** and press or to select **Function Settings** menu and press the MENU button to confirm.
3. Press or to select **Image Calib.** submenu and press the MENU button to enter.
4. Press or to switch the FFC mode.

Auto: The binoculars perform FFC automatically when the device is turned on or rebooted.

Semi-Auto: Hold the LRF button in the view mode to correct the non-uniformity of display.

Manual: Cover the lens cap, then hold the LRF button in the view mode to correct the non-uniformity of display.

5. Press the MENU button to confirm.
6. Press or to select other item or hold the MENU button to exit a menu.

2.2.26 DEFECTIVE PIXELS CORRECTION

The Defective Pixel Correction (DPC) can help users repair the occasional de-activated pixel within the display. This is fairly common in thermal optics, which is why so many of these optics come equipped with a DPC feature. 1-3 dead pixels are usually easily repaired by the user. Anything over 3 that cannot be repaired, will open the unit up to an approved warranty repair by AGM at their facility.

Before you start switch the palette to White Hot mode.

1. Press the MENU button to call the Main Menu.
2. Go to **Advanced Settings**, and press or to select **Function Settings** menu and press the MENU button to confirm.

3. Press  or  button to select  **DPC** submenu and press the MENU button  to enter.
4. Press the MENU button  to select the X or Y axis.
5. Press  or  button to set the coordinates until the cursor reaches the dead pixel.
6. Press the MENU button  twice to correct the dead pixel.
7. (Optional) Repeat 4 to 6 to correct the position for other dead pixels.
8. Hold the MENU button  to exit a menu.

2.2.27 BURN PREVENTION

This function can prevent damage to the thermal sensor from the sun or other high temperature bright light sources. When enabling this function, the shield will close until the environment turns to normal. This feature may be useful to help protect sensitive displays during extreme summer temperatures. AGM recommends all units be stored in room temperature whenever possible, as long periods of storage in extreme heat (such as inside a vehicle) may lead to issues with the display materials.

1. Press the MENU button  to call the Main Menu.
2. Go to  **Advanced Settings** and press  or  button to select  **Function Settings** menu and press the MENU button  to confirm.
3. Press  or  button to select  **Burn Prevention** submenu and press the MENU button  to enable or disable the Burn Prevention function.
4. Press  or  to select other item or hold the MENU button  to exit a menu.

2.2.28 LANGUAGE SETTING

You can select different languages of user interface.

1. Enter the  **Advanced Settings** menu.
2. Press  or  button to select  **General Settings** and press the MENU button  to confirm.
3. Press  or  button to select  **Language** submenu and press the MENU button  to enter.
4. Press  or  button to select the language as required and press the MENU button  to confirm.
5. Hold the MENU button  to exit.

2.2.29 TIME SETTING

1. Enter the  **Advanced Settings** menu.
2. Press  or  button to select  **General Settings** and press the MENU button  to confirm.
3. Press  or  button to select  **Time** submenu and press the MENU button  to enter the configuration interface.
4. Press the MENU button  to select the 24-hour or 12-hour clock system, or hour and minute to be synchronized and press  or  button to change.
5. Hold the MENU button  to exit.

2.2.30 DATE SETTING

1. Enter the  **Advanced Settings** menu.
2. Press  or  button to select  **General Settings** and press the MENU button  to confirm.
3. Press  or  button to select  **Date** submenu and press the MENU button  to enter the configuration interface.
4. Press the MENU button  to select the month, day or year to be synchronized and press  or  button to change the number.
5. Hold the MENU button  to exit.

2.2.31 UNIT SETTING

You can set the unit (yards or meters) of measurement for distance.

1. Enter the  **Advanced Settings** menu.
2. Press  or  button to select  **General Settings** and press the MENU button  to confirm.
3. Press  or  button to select  **Unit** submenu and press the MENU button  to enter the configuration interface.
4. Press  or  button to select yard (yd) or meter (m) and press the MENU button  to confirm.

2.2.32 AUTO POWER OFF

You can set the time for the automatic shutdown of the device as required.

1. Enter the  **Advanced Settings** menu.
2. Press  or  button to select  **General Settings** and press the MENU button  to confirm.
3. Press  or  button to select  **Auto Power Off** submenu and press the MENU button  to enter the configuration interface.
4. Press  or  button to select OFF, 15 min, 30 min or 45 min and press the MENU button  to confirm.

2.2.33 REBOOT

You can reset all the basic settings (Brightness, Contrast, Sharpness, PIP, etc.) to default values.

1. Enter the  **Advanced Settings** menu.
2. Press  or  button to select  **General Settings** and press the MENU button  to confirm.
3. Press  or  button to select  **Reboot** and press the MENU button . The window "Reset the basic settings" will appear.
 - **OK**: Restore the basic settings to defaults.
 - **CANCEL**: Exit without changing the settings.

2.2.34 RESTORE FACTORY SETTINGS

You can erase all content in the built-in storage and reset device to its default settings.

1. Enter the  **Advanced Settings** menu.
2. Press  or  button to select  **General Settings** and press the MENU button  to confirm.
3. Press  or  button to select  **Restore Factory Settings** menu item and press the MENU button . The window “Erase all content and settings” will appear.
 - **OK**: Erase all content and restore all settings to defaults.
 - **CANCEL**: Exit without changing the settings.

2.2.35 VERSION

You can view the device information such as firmware version and serial number.

1. Enter the  **Advanced Settings** menu.
2. Press  or  button to select  **General Settings** and press the MENU button  to confirm.
3. Press  or  button to select  **Version** item and press the MENU button  to confirm. The firmware version and serial number will be displayed. Also you can see the information about the free space of the built-in storage.

2.3 CLIENT SOFTWARE INTRODUCTION

Search the AGM Connect software in App Store (iOS System) or Google Play™ (Android System) and install the application on your mobile phone. Turn on the WiFi hotspot on the thermal device and then connect your phone to the hotspot.

- **Hotspot Name:** Wlan-<Serial No.>
- **Hotspot Password:** Last 9 digits of serial number of your thermal binoculars.

NOTE:

The device password is set by user at first activation. If the password was lost or forgotten, it can be reset. To reset a password perform the following steps:

1. When the device is turned on, hold the MENU button  to activate the Main menu.

2. Select  Restore item in the General Settings menu and press the MENU button  to restore all parameters to default settings.

1. Run the app and connect the phone or tablet with the device.
2. If the device is inactivated, set the password and activate it. If the device is activated, enter the password to add it to the app.
3. When the device is added, the live view can be seen. You can view the interface of the device on the software. User can change such image parameters as brightness, contrast, zoom, palettes directly via phone or tablet as well as record video on phone/tablet memory.

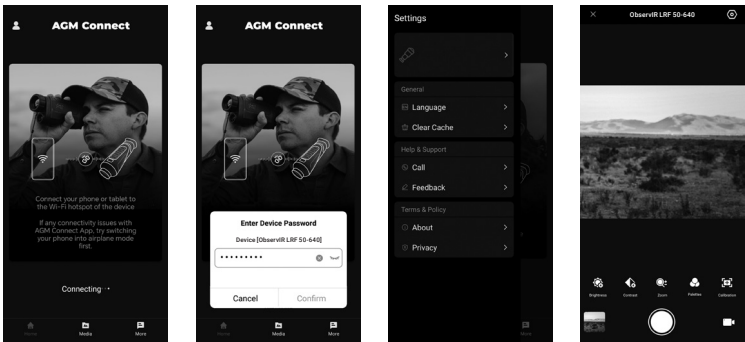


FIGURE 2-11. AGM CONNECT APP

3 MAINTENANCE

3.1 MAINTENANCE

3.1.1 CLEANING PROCEDURES

1. Gently brush off any dirt from the body of the device using a clean, soft cloth.
2. Moisten the cloth with fresh water and gently wipe down the external surfaces (except lenses).
3. Dry any wet surfaces (except lenses) using another dry, clean, soft cloth.
4. Using a lens brush, carefully remove all loose dirt from the lenses.
5. Dampen a cotton swab with ethanol and slowly, gently wipe down the lenses. Clean the glass surfaces using circular movements, starting from the center of the lens and moving out towards the edge, without touching the lens holder. Change the cotton swab after each circular stroke. Repeat this step until the glass surfaces are clean.
6. Clean the accessories with a soft brush (or cloth) dampened with soap and water.

3.1.2 PREPARING FOR EXTENDED STORAGE

CAUTION:

Thoroughly dry each item before placing them into the storage case.

To prepare the device for extended storage:

1. Clean the device and accessories.
2. Place all items into the storage case.
3. Make sure to remove the battery from the unit.

3.1.3 UPDATING THE DEVICE FIRMWARE

WARNING:

Please make sure the device is connected to the computer during the entire update process. Otherwise, it may cause unnecessary upgrade failure, firmware damage, etc.

1. Visit www.agmglobalvision.com/firmware website. Select your product, download the firmware update package to your PC and unzip it. Follow the detailed instructions on the website.
2. Connect the device to your PC with USB cable.
3. Turn on the device. Make sure the WiFi hotspot function is disabled.
4. Open the detected disk (USB drive) in file manager program. Copy the unzipped **digicap.dav** file and paste it to the root directory of the device.

5. Turn off the device completely, then power it back on. After awhile, the firmware update process will start automatically. During the update, the screen will display the inscription “Upgrading...”. The update process will be completed when the inscription “Upgrading...” goes out.

6. Turn off the device and disconnect it from your PC.

You can also enjoy automatic update function in AGM Connect App (see section 2.3 for details).

1. Start the AGM Connect App and tap the Settings icon in the left top corner.

2. Tap your device in the device list. The information about your device will be shown.

3. Tap **Checking for Upgrade** to detect and download the latest FW version.

3.2 TROUBLESHOOTING

Table 3-1 lists the most common malfunctions that may occur with your equipment. This table does not list all the malfunctions that may occur with your device. If the equipment malfunction is not corrected by the suggested actions, or a problem occurs that is not listed in this table, please contact AGM Global Vision’s Customer Support center or your retailer.

TABLE 3-1. TROUBLESHOOTING

MALFUNCTION	CORRECTIVE ACTION
The binoculars do not turn on.	1. Batteries are missing or improperly installed. Insert batteries or install correctly. 2. Batteries are dead. Replace the batteries. 3. Batteries, surfaces or contacts are dirty or corroded. Clean the contacts.
Device power indicator is off.	Examine whether the device is off-battery.
The image is not clear.	Perform the binoculars adjustment referring to section 2.1.
WiFi is not found.	Examine whether the WiFi function is turned on. If not, go to OSD menu and turn on WiFi.
Image capture or video recording fails.	Examine the items below: 1. Whether the device is connected to your PC and disabled the capture and recording. 2. Whether the storage space is full. 3. Whether the device is low-battery.
The PC cannot identify the binoculars.	Examine the items below: 1. Whether the device is connected to your PC with standard USB cable. 2. If you use other USB cables, make sure the cable length is no longer than 1 m.

4 WARRANTY INFORMATION

4.1 WARRANTY INFORMATION AND REGISTRATION

The below description of AGM Global Vision warranty terms and conditions refer specifically to AGM branded products purchased within the United States. Customers purchasing AGM products outside the United States can obtain specific information about their product's warranty term on the www.agmglobalvision.eu website.

4.1.1 WARRANTY INFORMATION

This product is guaranteed to be free from manufacturing defects in material and workmanship under normal use for a period of five (5) years from the date of purchase. In the event that a defect covered by the warranty below occurs during the applicable period stated above, AGM Global Vision, at its discretion, will either repair or replace the product; such action on the part of AGM Global Vision shall be the full extent of AGM Global Vision's liability, and the Customer's sole and exclusive reparation. This warranty does not cover a product if it has been (a) used in ways other than its normal and customary manner; (b) subjected to misuse; (c) subjected to alterations, modifications or repairs by the Customer or by any party other than AGM Global Vision without prior written consent of AGM Global Vision; (d) is the result of a special order or categorized as "close-out" merchandise or merchandise sold "as-is" by either AGM Global Vision or the AGM Global Vision dealer; or (e) merchandise that has been discontinued by the manufacturer and either parts or replacement units are not available due to reasons beyond the control of AGM Global Vision. AGM Global Vision shall not be responsible for any defects or damage that in AGM Global Vision's view are a result from the mishandling, abuse, misuse, improper storage or improper operation of the device, including use in conjunction with equipment that is electrically or mechanically incompatible with, or of inferior quality to, the product, as well as failure to maintain the environmental conditions specified by the manufacturer. This warranty is extended only to the original purchaser. Any breach of this warranty shall be enforced unless the customer notifies AGM Global Vision at the address noted below within the applicable warranty period.

The customer understands and agrees that except for the foregoing warranty, no other warranties written or oral, statutory, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose, shall apply to the product. All such implied warranties are hereby and expressly disclaimed.

4.1.2 LIMITATION OF LIABILITY

AGM Global Vision will not be liable for any claims, actions, suits, proceedings, costs, expenses, damages, or liabilities arising out of the use of this product. Operation and use of the product are the sole responsibility of the Customer. AGM Global Vision's sole undertaking is limited to providing the products and services outlined herein in accordance with the terms and conditions

of this Agreement. The provision of products sold and services performed by AGM Global Vision to the Customer shall not be interpreted, construed, or regarded, either expressly or implied, as being for the benefit of or creating any obligation toward any third party of legal entity outside AGM Global Vision and the Customer; AGM Global Vision's obligations under this Agreement extend solely to the Customer. AGM Global Vision's liability hereunder for damages, regardless of the form or action, shall not exceed the fees or other charges paid to AGM Global Vision by the customer or customer's dealer. AGM Global Vision shall not, in any event, be liable for special, indirect, incidental, or consequential damages, including, but not limited to, lost income, lost revenue, or lost profit, whether such damages were foreseeable or not at the time of purchase, and whether or not such damages arise out of a breach of warranty, a breach of agreement, negligence, strict liability, or any other theory of liability.

4.1.3 PRODUCT REGISTRATION

In order to validate the warranty on your product, the customer must complete and submit AGM Global Vision PRODUCT REGISTRATION FORM on our website (www.agmglobalvision.com/customer-support).

4.1.4 OBTAINING WARRANTY SERVICE

To obtain warranty service on your unit, the End-user (Customer) must notify the AGM Global Vision service department via e-mail. Send any requests to support@agmglobalvision.com to receive a Return Merchandise Authorization number (RMA). When returning any device, please take the product to your retailer, or send the product, postage paid and with a copy of your sales receipt, to AGM Global Vision's service center at the address listed above. All merchandise must be fully insured with the correct postage; AGM Global Vision will not be responsible for improper postage or merchandise that becomes lost or damaged during shipment. When sending product back, please clearly write the RMA# on the outside of the shipping box. Please include a letter that indicates your RMA#, the Customer's Name, a Return Address, reason for the return, contact information (valid telephone numbers and/or an e-mail address), and proof of purchase that will help us to establish the valid start date of the warranty. Product merchandise returns that do not have an RMA# listed may be refused, or a significant delay in processing may occur. Estimated Warranty service time is 10-20 business days. The End-user/Customer is responsible for postage to AGM Global Vision for warranty service. AGM Global Vision will cover return postage/shipping after warranty repair to the End-user/Customer only if the product is covered by the aforementioned warranty. AGM Global Vision will return the product after warranty service by domestic UPS Ground service and/or domestic mail. Should any other requested, required, or international shipping methods be necessary, the postage/shipping fee will be the responsibility of the End-user/Customer.

For service, repair or replacement, please contact:

AGM Global Vision, LLC

2407 E Interstate 30, Suite 100

Grand Prairie, TX 75050

Tel. 928.333.4300

support@agmglobalvision.com

www.agmglobalvision.com

5 SPECIFICATIONS

5.1 SPECIFICATIONS

	ObservIR LRF 50-640	ObservIR LRF 60-1280
Thermal Channel Image Sensor	12μm Uncooled Focal Plane Array	12μm Uncooled Focal Plane Array
Thermal Channel Resolution	640 × 512	1280 × 1024
Thermal Channel Refresh Rate	50 Hz	50 Hz
Response Waveband	8μm to 14μm	8μm to 14μm
NETD	Less than 15 mK (25°C, F#=1.0)	Less than 18 mK (25°C, F#=1.0)
Thermal Channel Lens System	50 mm; F/1.0	60 mm; F/1.0
Thermal Channel Field of View	8.8° × 5.3°	14.6° × 8.8°
Thermal Channel Magnification	4.5x / 9x / 13.5x / 20x	2.5x / 5x / 10x / 20x
Thermal Channel Detection Range (6' object)	2,600 m (2,840 yd)	3,100 m (3,390 yd)
Flat Field Correction (FFC)	Auto, Semi-Auto, Manual	Auto, Semi-Auto, Manual
Thermal Channel Palettes	Black Hot, White Hot, Red Hot, Fusion, Red Monochrome, Green Monochrome	Black Hot, White Hot, Red Hot, Fusion, Red Monochrome, Green Monochrome
Thermal Scene Modes	General, Compressed	General, Compressed
Hot Tracking (Thermal Channel)	Yes	Yes
Digital Channel Image Sensor	Progressive Scan CMOS, 1/1.8"	Progressive Scan CMOS, 1/1.8"
Digital Channel Resolution	3840×2160	3840×2160
Digital Channel Magnification	5.5x / 11x / 16.5x / 22x	5.5x / 11x / 16.5x / 22x
Digital Channel Field of View	7.3°× 4.1°	7.3°× 4.1°
Digital Channel Lens System	60 mm, F/2.2	60 mm, F/2.2
Digital Channel Modes	Day, Night, Green, Yellow, Auto	Day, Night, Green, Yellow, Auto
Digital Channel Viewing Range at Night	400 m	400 m
Diopeter Adjustment	-5D to +3D	-5D to +3D
Interpupillary Distance	60 mm to 74 mm	60 mm to 74 mm
Display	1920×1080, 0.49", OLED, 50 FPS	1920×1080, 0.49", OLED, 50 FPS

ObservIR LRF 50-640 ObservIR LRF 60-1280		
Distance Measurement	Laser Rangefinder: up to 1,000 m, ±1 m accuracy	Laser Rangefinder: up to 1,000 m, ±1 m accuracy
Laser Wavelength	905 nm	905 nm
Laser Safety Class	Class 1	Class 1
Infrared Light	Built-in 850nm Smart IR. Power and beam angle adjustment	Built-in 850nm Smart IR. Power and beam angle adjustment
WiFi Hotspot	Yes	Yes
PIP	Yes	Yes
Digital Magnetic Compass	Yes	Yes
GPS	Yes	Yes
Zoom Pro	Yes	No
Image Boost 3.0	Yes	Yes
Standby Mode	Yes	Yes
Storage	Built-in EMMC (64 GB)	Built-in EMMC (64 GB)
Video/Audio Recording	Yes / Yes	Yes / Yes
Image Capture	Yes	Yes
Local Album	Yes	Yes
Battery Type	One NE-7255 Li-ion Battery 7.18 V / 5400 mAh	One NE-7255 Li-ion Battery 7.18 V / 5400 mAh
Battery Life (operating)	Up to 8.5 hours continuous running (@25°C, WiFi hotspot off, LRF and Zoom Pro on)	Up to 6 hours continuous running (@25°C, WiFi hotspot off, LRF on)
Power	5 VDC / 9 VDC, 3 A; USB Type-C interface; Supports external power supply; Support direct charging; Supports fast charging	5 VDC / 9 VDC, 3 A; USB Type-C interface; Supports external power supply; Support direct charging; Supports fast charging
Operating Temperature	-30°C to 55°C (-22°F to 131°F)	-30°C to 55°C (-22°F to 131°F)
Protection Level	IP67 (Waterproof)	IP67 (Waterproof)
Dimensions	229 × 148 × 80 mm (9.0 × 5.8 × 3.1 in)	230 × 153 × 83 × mm (9.1 × 6.0 × 3.3 in)
Weight (w/o battery)	0.83 kg (1.83 lb)	0.89 kg (1.97 lb)

*All data is subject to change without notice.



AGM Global Vision, LLC

MAIN OFFICE

2407 E Interstate 30,
Suite 100
Grand Prairie, TX 75050
USA
Tel. +1.928.333.4300
info@agmglobalvision.com
www.agmglobalvision.com

EUROPEAN OFFICE

#6 Andrey Lyapchev Blvd
Sofia, P.C. 1756
Bulgaria
Tel. +35.988.560.0326
info@agmglobalvision.eu
www.agmglobalvision.eu

DOWNLOAD AGM CONNECT APP:



Google Play Store



Apple App Store

AGMglobalvision.com